

Australia Standard Pool Guard Temp Pool Fencing

Complying with Australian Standard A.S. 1926.1-2012 – Swimming Pool Safety, temporary pool fencing can secure your pools or spas no matter under construction or current maintenance. Self-closing gate help you stop your toddlers or pets entering the dangerous area accidentally.



FEATURES & BENEFITS

360° Full Hand Welding

Full Welding secures firm and stable structure. Skilled hand welding ensures optimum strength.



Comply with Australia Standard

Strict QC system ensure all fencing are produced according to A.S. 1926.1-2012 Swimming Pool Safety.

Australian Certified



Tested & Certified to Australian Standard A.S. 1926.1-2012 Swimming Pool Safety



Withstand Harsh Environment

Pre-galvanised or hot dipped galvanised finish for most durability even in harsh environments.



Self-Closing Doors

High quality child or pet guard – self-closing doors – Helps you protect your families far from danger.




TECHNICAL DETAILS



Pipe Infill Temporary Pool Fencing

Item	Frame size	Top/bottom pipe size	Infill size	Fence size (L x H)
PTP-1	32 mm O.D.	25 mm O.D.	14 mm O.D.	2300 mm x 1350 mm
PTP-2	42 mm O.D.	32 mm O.D.	25 mm O.D.	2400 mm x 1300 mm
PTP-3	38 mm O.D.	32 mm O.D.	19 mm O.D.	2400 mm x 1200 mm

TECHNICAL DETAILS

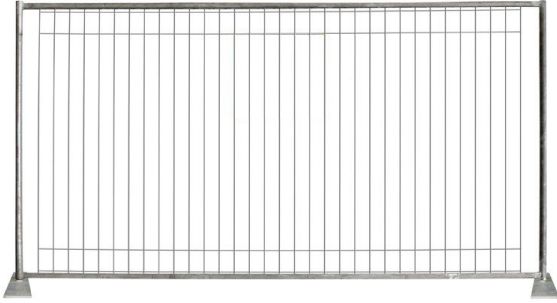

Rod Infill Temporary Pool Fencing		
	Type 1	Type 2
Panel Height	1250 mm	1050 mm
Panel Length	2000 mm	2000 mm
Frame Diameter	25 mm square tube 32 mm O.D.	25 mm square tube 32 mm O.D.
Infill Bars	8 mm x 5 mm wire 7 mm steel rod	8 mm x 5 mm wire 7 mm steel rod
Infill Bar Spacing	70 mm or 65 mm	70 mm or 65 mm
Gap From Frame Bottom to Ground	Max. 100 mm	Max. 100 mm

OPTIONAL ACCESSORIES

